

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 November 2002 (07.11.2002)

PCT

(10) International Publication Number
WO 02/089101 A1

(51) International Patent Classification⁷: **G09F 13/18**

(21) International Application Number: **PCT/GB02/01873**

(22) International Filing Date: **26 April 2002 (26.04.2002)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
0110238.3 **26 April 2001 (26.04.2001)** **GB**

(71) Applicant (for all designated States except US): **PACKER INNOVATIONS LIMITED [GB/GB]**; Block 11, Unit 2, Dunyvan Industrial Estate, Coatbridge ML5 4AQ (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **PACKER, John, Rouse [GB/GB]**; 23 Hillview Crescent, Uddingston G71 60W (GB).

(74) Agent: **FITZPATRICKS**; 4 West Regent Street, Glasgow G2 1RS (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **ILLUMINATED SIGN**

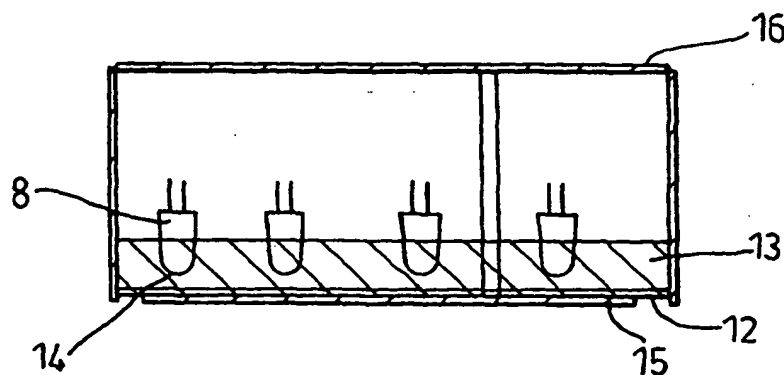

(57) Abstract: A sign for conveying information, having a plastic body, illuminating means such as light emitting diodes (LEDs) mounted within the body and a reflective coating applied on a surface of the body carrying information to reflect light emitted from the illumination means back into the body of the sign. The sign may have the LEDs mounted to face an inside surface of the sign capable of scattering light to a transparent surface to produce an illuminated area. Scattering the light from scattering surface will produce a

substantially even intensity of light across the illuminated area of the sign after its transmission from the sign.

ILLUMINATED SIGN

This invention relates to illuminated signs and more
5 particularly to improved illuminated signs which maximise
the light output from illumination means within the sign
to offer improved visibility and safety and furthermore,
require lower power usage without loss of effectiveness.

10 Illuminated signs are a particularly useful selling tool
for goods in shops. The signs can be illuminated in a
variety of eye-catching colours to attract attention.
Electrically illuminated signs may be mounted in the
window or exterior of shops, guesthouses, hotels and
15 other establishments to display information.

One known form of illuminated sign comprises one or more
neon tubes which are formed into a particular shape such
as a letter or a plurality of letters. These signs are
20 relatively heavy to lift into position which makes the
sign awkward to install without assistance.

Furthermore, power to illuminate the sign is supplied
from a mains power connection. The power required to run
a single letter sign formed from a neon tube is around
25 0.5W. If the sign has to be removed for cleaning either
the window or the sign, due to the high voltages used for
these signs, there is a danger that a person moving the
sign may receive an electric shock.

30 An alternative to a shaped neon sign is known as a "sign
box". In this case, the sign is formed of a hollow
plastics body upon which the information which the sign
is to convey is provided and the illumination means are
provided within the body. The illumination means in the

CONFIRMATION COPY

signs are generally light emitting diodes, neon tubes, or standard light bulbs.

In this case, when the illumination means are on, the interior of the sign box is flooded with light which illuminates the front of the sign in order to draw attention to the information provided thereon. Where light emitting diodes are used, such signs are relatively simple to install and cheap to run, however the light emitted from the illumination means is not efficiently used in illuminating the sign. Light emitting diodes are, in effect, point sources of light. Therefore, signs illuminated using light emitting diodes typically consist of a plurality of point sources which illuminate the sign, usually through a partially transparent front section or by producing a "halo" effect around the side and/or back of a sign having an opaque front. In use, light emitting diodes produce a light pattern that is uneven in intensity across the illuminated area of the sign.

The present invention aims to provide an improved sign which overcomes or at least mitigates the problems which are associated with the above described known sign devices.

In accordance with a first aspect of the present invention there is provided a sign for conveying information, said sign comprising a body, at least one illuminating means mounted within the body, wherein the body is provided with light transmission means, for transmitting light from the body, said at least one illuminating means being positioned such that light emitted from the illuminating means is directed

substantially to a light scattering interior surface of the body; the light being scattered from said light scattering surface prior to its transmission from the sign via the light transmission means.

5

Scattering the light from the scattering surface will produce a substantially even intensity of light across the illuminated area of the sign after its transmission from the sign.

10

Preferably, the body is made from a plastics material.

Preferably, the light transmission means is provided by a surface of the body which is at least in part

15 transparent.

Optionally, a second light transmission means is provided by a space between surfaces of the body.

20

Optionally, a third light transmission means is provided by an aperture in at least one of the surfaces.

25

Preferably, the light scattering interior surface and the light transmission means are arranged opposite one another in the body.

Preferably, the illuminating means is at least one light emitting diode (LED).

30

Preferably the at least one light emitting diode is provided with a watertight housing.

Preferably the watertight housing is made from a moulded plastics material.

According to a second aspect of the present invention there is provided a sign for conveying information, said sign comprising a plastics body, illuminating means
5 mounted within the body and a reflective coating applied on a surface of the body carrying information to reflect light emitted from the illumination means back into the body of the sign.

10 Advantageously, the sign body is formed of acrylic and may be formed in a casting process.

Preferably, the illuminating means comprises a light emitting diode (LED).

15 Advantageously, the illuminating means comprises a plurality of light emitting diodes (LEDs).

Conveniently, the light emitting diodes are distributed
20 evenly throughout the body of the sign.

Preferably, the reflective coating is provided upon the entire surface of the sign body which carries the information.

25 Alternatively, the reflective coating is provided only on selected areas of the surface of the sign body carrying the information.

30 Conveniently, the reflective coating is interrupted in the region of the information which may take the form of letters, numerals or other insignia, which the sign is intended to convey.

In one embodiment, the light emitting diodes are provided along one edge of the sign body only and the reflective coating is applied to the surface of the sign body only in the region of the light emitting diodes. This
5 provides an edge lit sign in which the light emitted from the diodes radiates throughout the body of the sign from one edge. The light emitting diodes may for example be provided along the upper edge of the sign such that the light radiates down through the body of the sign.

10

Aspects of the present invention will now be described with reference to and as shown in the accompanying drawings in which:-

15 **Figure 1A** is a plan view of a sign according to a first embodiment of the present invention;
 Figure 1B is a cross sectional view along the line A-A of Figure 1;
 Figure 2A is a plan view of a sign according to a
20 second embodiment of the present invention;
 Figure 2B is a cross sectional view along the line B-B of Figure 2A;
 Figure 3A is a plan view of a sign according to a
 third embodiment of the present invention;
25 **Figure 3B** is a cross sectional view along the line C-C of Figure 3A;
 Figure 4A is a plan view of a sign according to a fourth embodiment of the present invention;
 Figure 4B is a cross sectional view along the line
30 D-D of Figure 4A;
 Figure 5A is plan view of a sign according to a fifth embodiment of the present invention;
 Figure 5B is a cross sectional view along the line E-E of Figure 5B;

Figure 6 is a cross sectional view of a sixth embodiment of the present invention;
Figure 7A is a cross sectional view of a light emitting diode encased in a watertight housing; and
5 Figure 7B is a plan view of the light emitting diode and housing of Figure 7A.

Turning now to the accompanying drawings, Figure 1 shows a sign 1 which in this particular embodiment is formed
10 into the shape of a letter "a". The sign comprises a solid cast plastics body 2 which may be made of a material such as for example acrylic

The rear surface 3 of the sign is coated with a
15 protective coating 4 which may be for example a clear lacquer. The protective coating may act to seal the electrical components (to be described below). The front surface 5 of the sign (the surface which will be in a window or on view to the public) is coated with a
20 reflective coating 6 such as for example a suitable paint finish or mirrored coating. A surface finish 7 such as for example a decorative finish, a stainless steel facing, anodised aluminium facing, a paint finish or a plastics coating is applied to the front surface 5 of the
25 sign over the reflective coating 6.

A light source, which in this embodiment is represented by a plurality of light emitting diodes 8, is mounted within the body 2 of the sign. The diodes may be
30 equispaced around the sign body as shown in Figure 1. The electrical connections 9 for the light emitting diodes pass through the protective coating 4 and means are provided (not shown) for connecting the light

emitting diodes 8 to an electrical power source (not shown) for illumination.

When the light emitting diodes 8 of Figure 1 are
5 illuminated, light is emitted from the diodes and passes through the plastics body 2 of the sign. The light which is incident upon the inside of the front surface 5 of the sign body is reflected back into the sign by the reflective coating 6 and this has the effect of
10 scattering light within the sign body. This scattered light exits the body of the sign through the sides thereof. Where no reflective coating is applied. This provides a clear sharp edge to the body 2 of the sign.

15 For a letter as shown in Figure 1, the sign body 2 may be around 10 to 12 mm thick which is substantially less than present signage which is generally of the order of around 50 mm thick and thereby provides an immediate saving on materials.

20

A further embodiment of the present invention is shown in Figure 2 in which the sign comprises a solid plastics sign body 2 as in the first embodiment. In this case however, the sign is not provided in the form of a
25 letter, but is a substantially rectangular sign body 9 which could be hung in a window or above a window or door or a shop or the like.

In this case, the reflective coating 6 and the surface
30 treatment 7 are not provided over the entire surface of the sign body 9. The coatings are interrupted on the front surface 5 of the sign in the region of the information which the sign conveys. In the embodiment shown, the information provided on the sign comprises the

combination of the numerals "21" with a border around them. As shown in Figure 2B, which is a cross section through the sign body 2 of Figure 2A along the line B-B, the coatings 6, 7 are interrupted in the region of the
5 numerals and the border.

Illuminating means in the form of light emitting diodes 8 are provided within the body 2 of the sign as shown in Figure 2B. The light emitting diodes may be located
10 around an edge 10 of the sign as illustrated in Figure 2A, or alternatively they may be distributed throughout the body 2 of the sign. Where the light emitting diodes are provided throughout the body of the sign they are preferably evenly distributed.

15

In the embodiment shown in Figure 3A, an edge-lit sign is shown. In this case, the sign body 2 is formed of a solid plastics material as in accordance with the other embodiments. In this embodiment, the light emitting
20 diodes 8 are provided along the upper edge 11 of the sign body. A reflective coating 6 is provided on the front surface 5 of the sign in the region of the light emitting diodes.

25 In this embodiment, the reflective coating is provided not only on the front surface of the sign body but also on the rear surface and on the sides of the upper part of the sign body. Therefore, the entire area of the sign body containing the light emitting diodes is enclosed by
30 the reflective coating. The coating could also be extended for example around the edge of the sign body to enhance the reflection of light within the sign.

Light emitted from the diodes which is incident upon the reflective coating is reflected back into the body of the sign and radiates through the sign from the source of the illumination. As the reflective coating is applied over
5 each of the front, rear and sides of the upper portion of the sign body, light is reflected from each surface and encouraged to radiate throughout the sign body. This enables the entire sign body to be illuminated from a light source located at one edge only which is both cost
10 effective to run and to manufacture and also provides for even illumination of the sign.

Figures 4A and 4B show a fourth embodiment of the invention. Figure 4A is a plan view of a letter,
15 containing an illuminating means 12 which consists of a plurality of light emitting diodes 8 embedded in a perspex block 13. The light emitting diodes are connected by means of electrical wires (not shown) to an electrical power source (not shown). The front of the
20 light emitting diode 14 points towards a light scattering surface 15. Transparent surface 16 is arranged with respect to the light scattering surface such that the majority of the light emitted from the light emitting diode will be reflected and scattered from the light
25 scattering surface 15 towards and through the transparent surface 16. Scattering of light will provide a more even light intensity distribution across the transparent surface, and provide more even illumination of the sign.

30 Figures 5A and 5B show a fifth embodiment of the present invention. Figure 5A is a plan view of a letter containing a plurality of illuminating means being shown in more detail in Figures 5B, 6 and 7.

Figure 5B shows a sign having a transparent surface 16 and light scattering surface 15, which, in this example, is opaque. The light emitting diodes are each mounted in a transparent watertight housing 17 made from perspex, in this example. It will be appreciated that other suitable materials may be used to construct the housing.

The housing is attached to the opaque light scattering surface such that the light emitting diode 8 points downwards towards the light scattering surface 15. In use, the light emitted from the light emitting diode will be mainly directed to the surface and will be scattered from the surface upwards towards and through the transparent surface.

In another example, the base of the housing may be opaque and can act to scatter the light emitted from the light emitting diode.

Figure 6 shows another embodiment of the present invention. In this case the sign 1 is designed to be back lit to produce a "halo" lighting effect around opaque lettering. To achieve this effect, the light emitting diodes 8 face an opaque, light scattering front surface 15 of the letter and light is scattered backwards to a transparent surface 16 and out of the letter or symbol around its edges. As the light has been scattered from the opaque surface, a more even distribution of light intensities will arise.

Figures 7A and 7B show, in more detail, the housing 17 containing a light emitting diode 8 with connections 19 and a base 18.

This provides the advantage of enabling each light emitting diode 8 to be individually cast within such a housing thereby allowing a greater degree of flexibility regarding the type of signs which can be manufactured.

5 For example, a combination of blocks containing three light emitting diodes could be combined with a number of these light emitting diodes to provide the lighting required by a particular design. In some examples, the cast may be coloured to create a coloured effect when

10 light is transmitted through it.

Furthermore, individually housing each of the light emitting diodes effectively protects each of them from exposure to environmental factors such as rain and

15 reduces the size of the cast normally required thereby also reducing the weight of the signage and the overall cost.

Signs manufactured in accordance with the above described

20 embodiments of the present invention require little or no specialist installation. The signs run on a low voltage and so do not present a threat to users in relation to electric shocks. Furthermore, the signs have relatively low running costs which compared to currently used signs.

25 In addition, the signs described above can be easily cleaned and maintained and are particularly environmentally friendly as they do not radiate excessive amounts of heat into the surrounding environment.

30 Improvements and modifications may be incorporated herein without deviating from the scope of the invention.

Claims

1. A sign for conveying information, said sign
5 comprising a body, at least one illuminating means
mounted within the body, wherein the body is provided
with light transmission means for transmitting light from
the body, said at least one illuminating means being
positioned such that light emitted from the illuminating
10 means is directed substantially to a light scattering
interior surface of the body, the light being scattered
from said light scattering surface prior to its
transmission from the sign via the light transmission
means.

15

2. A sign as claimed in claim 2, wherein the body is
made from a plastics material.

3. A sign as claimed in claim 1 or claim 2, wherein,
20 the light transmission means is provided by a surface of
the body which is at least in part, transparent.

4. A sign as claimed in any one of claims 1 to 3,
wherein, a second light transmission means is provided by
25 a space between surfaces of the body.

5. A sign as claimed in any one of claims 1 to 4,
wherein, a third light transmission means is provided by
an aperture in at least one of the surfaces.

30

6. A sign as claimed in any preceding claim, wherein
the light scattering interior surface and the light
transmission means are arranged opposite one another in
the body.

7. A sign as claimed in any preceding claim, wherein the illuminating means is at least one light emitting diode (LED).

5

8. A sign as claimed in any preceding claim, wherein the at least one light emitting diode is enclosed in a watertight housing.

10 9. A sign as claimed in claim 8, wherein the watertight housing is made from moulded plastic.

10. A sign for conveying information, said sign comprising a plastics body, illuminating means mounted
15 within the body and a reflective coating applied on a surface of the body carrying information to reflect light emitted from the illumination means back into the body of the sign.

20 11. A sign as claimed in claim 10, wherein the sign body is formed of acrylic.

12. A sign as claimed in claim 10 or claim 11, wherein the sign is formed in a casting process.

25



13. A sign as claimed in any of claims 10 to claim 12, wherein the illuminating means comprises at least one light emitting diode (LED).

30 14. A sign as claimed in any of claims 10 to 13, wherein the illuminating means comprises a plurality of light emitting diodes.

15. A sign as claimed in claim 14, wherein the light emitting diodes are distributed evenly throughout the body of the sign.
- 5 16. A sign as claimed in any of claims 10 to 15, wherein the reflective coating is provided upon the entire surface of the sign body which carries the information.
- 10 17. A sign as claimed in any one of claims 10 to 15, wherein the reflective coating is provided only on selected areas of the surface of the sign body carrying the information.
- 15 18. A sign as hereinbefore described with reference to Figures 4A to 7B.
19. A sign as hereinbefore described with reference to Figures 1A to 3B.

20

1/6

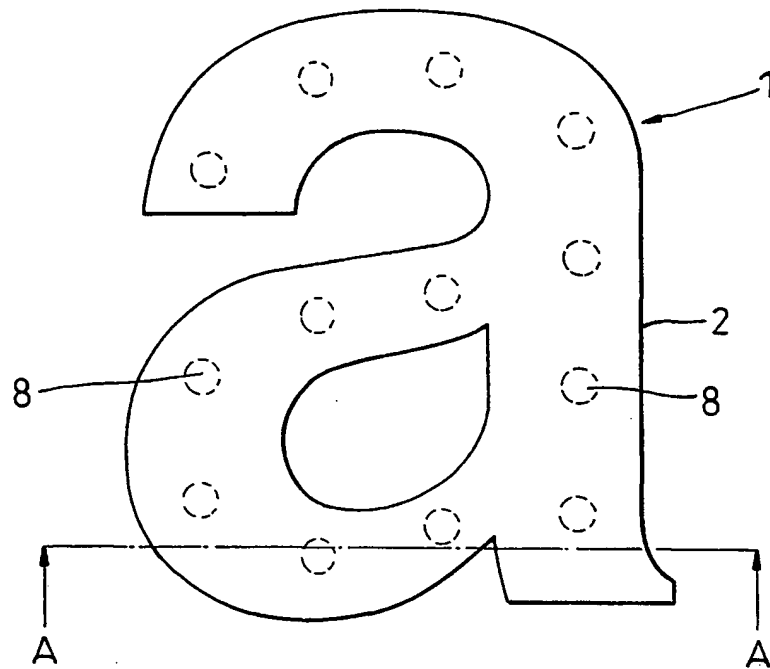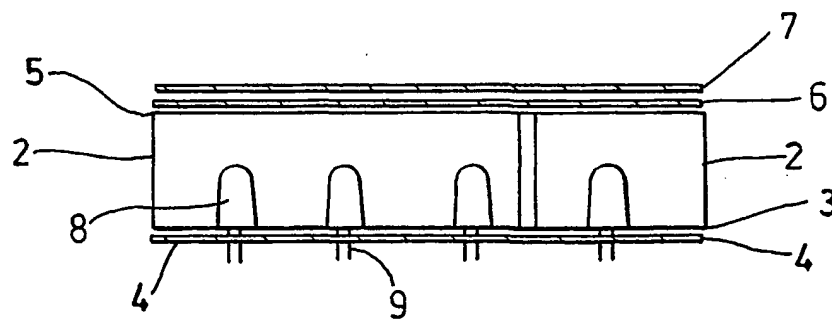**Fig. 1A****Fig. 1B**

2/6

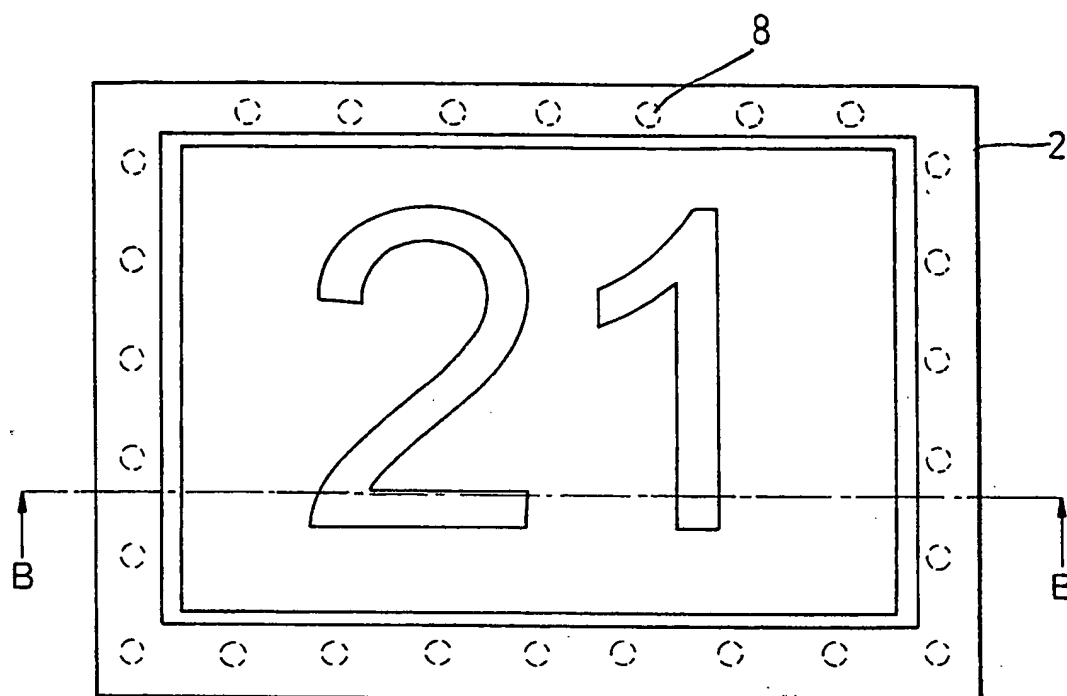


Fig. 2A

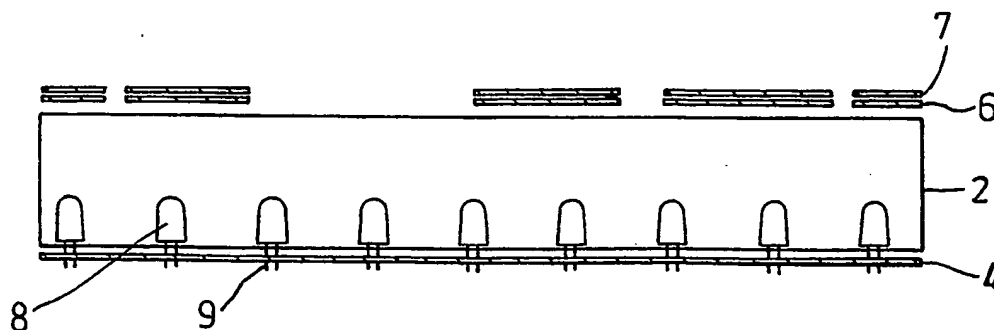


Fig. 2B

3/6

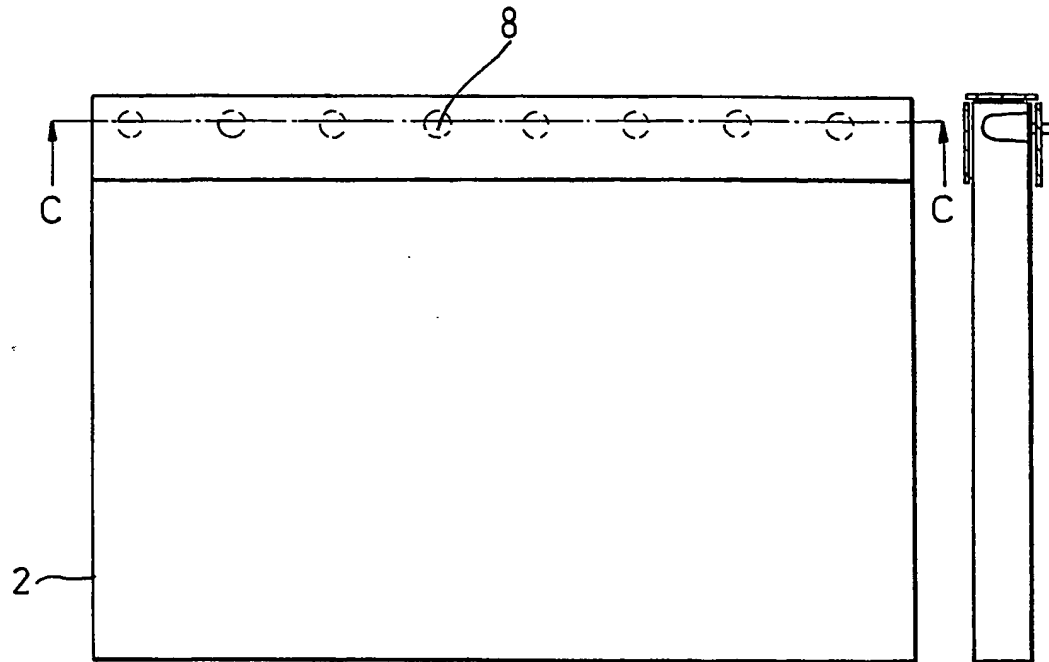


Fig. 3A

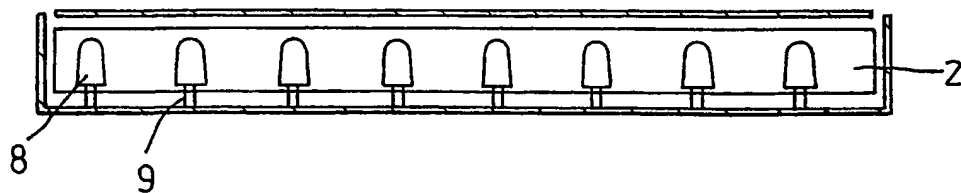


Fig. 3B

4/6

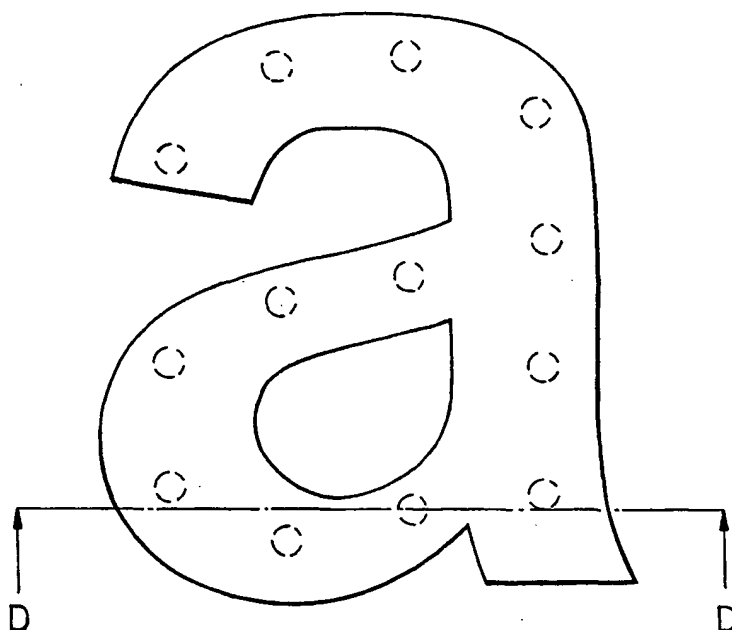


Fig. 4A

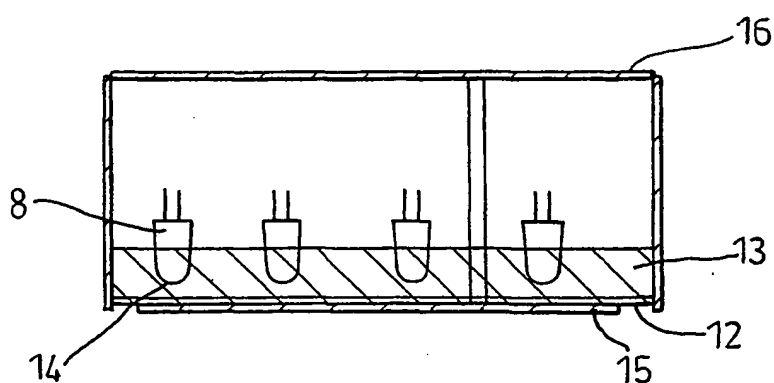


Fig. 4B

5/6

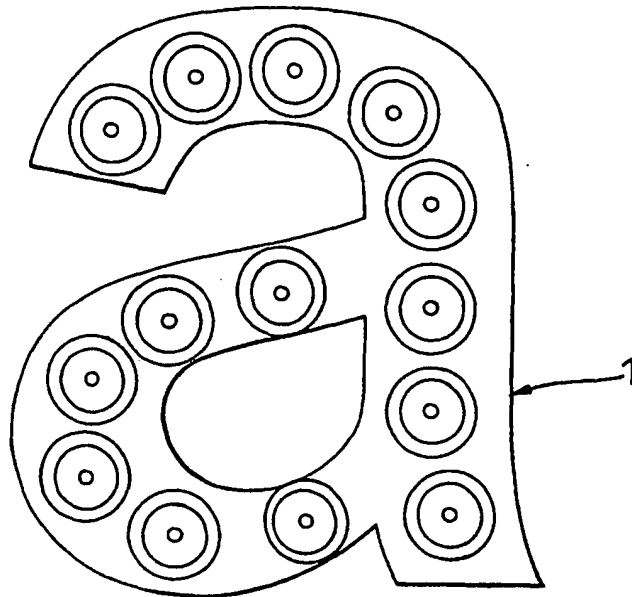


Fig. 5A

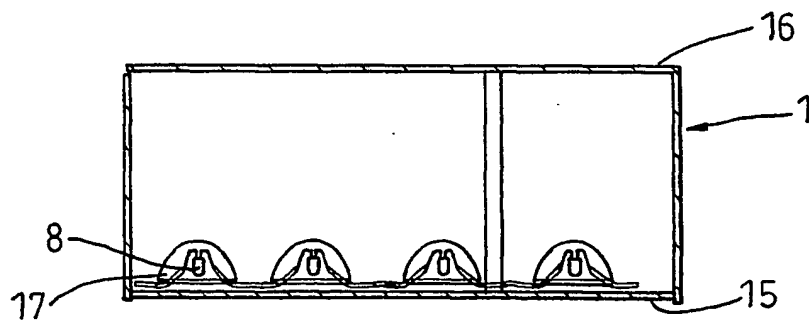


Fig. 5B

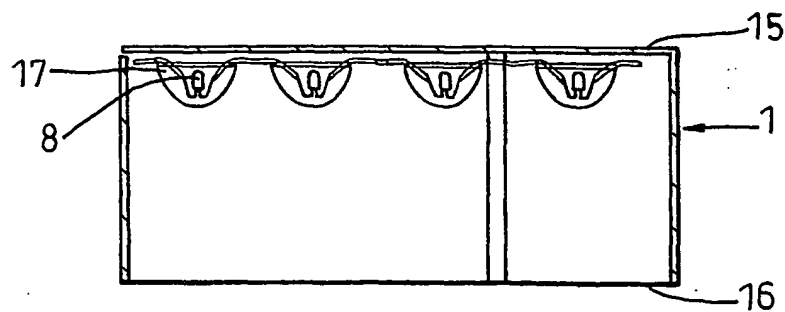


Fig. 6

6/6

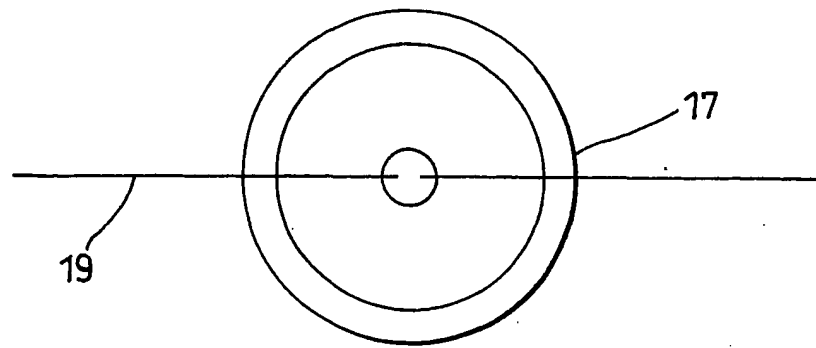


Fig. 7A

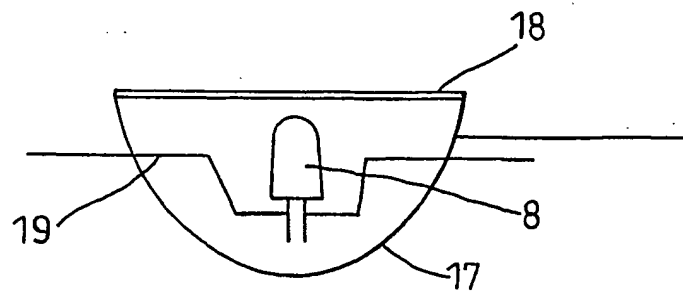


Fig. 7B

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 02/01873

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G09F13/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G09F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 4 903 172 A (SCHOENIGER KARL-HEINZ ET AL) 20 February 1990 (1990-02-20) the whole document	1-7,10, 13-19 8,9,11, 12
X A	US 5 027 258 A (SCHOENIGER KARL-HEINZ ET AL) 25 June 1991 (1991-06-25) the whole document	1-7,10, 13-19 8,9,11, 12
X A	WO 99 03086 A (LISOL SCANDINAVIA AB (SE)) 21 January 1999 (1999-01-21) the whole document	1-7,10, 13-19 8,9,11, 12

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

21 August 2002

Date of mailing of the international search report

04.09.02

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ake Olofsson

PCT/GB 02/01873

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

PCT/GB 02/01873

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 4903172	A	20-02-1990	DE	3730591 C1	07-07-1988
			AT	98035 T	15-12-1993
			DE	3825436 A1	23-03-1989
			DE	3885977 D1	13-01-1994
			EP	0306659 A2	15-03-1989
			ES	2049228 T3	16-04-1994

US 5027258	A	25-06-1991	DE	3919925 A1	20-12-1990
			AT	97756 T	15-12-1993
			DE	59003584 D1	05-01-1994
			EP	0403764 A1	27-12-1990

WO 9903086	A	21-01-1999	SE	512755 C2	08-05-2000
			AU	8367298 A	08-02-1999
			EP	1010160 A1	21-06-2000
			SE	9702643 A	09-01-1999
			WO	9903086 A1	21-01-1999

US 2634530	A	14-04-1953	NONE		

DE 20118930	U	24-01-2002	DE	20118930 U1	24-01-2002
